

05-24-00

A

05/23/00



jc828 U.S. PTO



jc658 U.S. PTO

09/576754

05/23/00

# UTILITY PATENT APPLICATION TRANSMITTAL

Submit an original and a duplicate for fee processing  
(Only for new nonprovisional applications under 37 CFR 1.53(b))

## ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, D.C. 20231

Attorney Docket No. 99,993

First Named Inventor: Douglas R. Adler, et. al.

Express Mail No. EL118813759US

Total Pages 56

## APPLICATION ELEMENTS

1. ☒ Transmittal Form with Fee
2. ☒ Specification (including claims and abstract) [Total Pages 42]
3. ☒ Formal Drawings [Total Sheets 5]
4. ☒ Oath or Declaration [Total Pages 3]
  - a. ☒ Unexecuted
  - b. ☐ Copy from prior application

**[Note Boxes 5 and 17 below]**

  - i. ☐ Deletion of Inventor(s) Signed statement attached deleting inventor(s) named in the prior application
5. ☐ Incorporation by Reference: The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program
7. ☐ Nucleotide and/or Amino Acid Sequence Submission
  - a. ☐ Computer Readable Copy
  - b. ☐ Paper Copy
  - c. ☐ Statement verifying above copies

## ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers [Total Pages ]
9. ☒ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)
  - ☐ PTO-1449 Form
  - ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (Should be specifically itemized)
14. ☒ Small Entity Statement(s) [Total Pages 3]
  - ☒ Enclosed
  - ☐ Statement filed in prior application; status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
16. ☒ Other: **Duplicate Utility Transmittal letter, Assignment Recordation Cover Sheet in Duplicate, Certificate of Express Mailing.**

17. If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information:  
☐ Continuation ☐ Divisional ☐ Continuation-in-part of prior application Serial No.

## APPLICATION FEES

BASIC FEE				\$760.00
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	
Total Claims	30 -20=	10	x \$22.00	\$220.00
Independent Claims	5 - 3=	2	x \$ 82.00	\$164.00
<input type="checkbox"/> Multiple Dependent Claims(s) if applicable				+\$270.00 \$
Total of above calculations =				\$1,144.00
Reduction by 50% for filing by small entity =				\$(572.00)
<input type="checkbox"/> Assignment fee if applicable				+ \$40.00 \$40.00
TOTAL =				<b>\$612.00</b>

## UTILITY PATENT APPLICATION TRANSMITTAL


Attorney Docket No. 99,993

18. ☐ Please charge my Deposit Account No. 13-2490 in the amount of \$ .
19. ☒ A check in the amount of \$612.00 is enclosed.
20. The Commissioner is hereby authorized to credit overpayments or charge any additional fees of the following types to Deposit Account No. 13-2490:
- a. ☒ Fees required under 37 CFR 1.16.
  - b. ☒ Fees required under 37 CFR 1.17.
  - c. ☒ Fees required under 37 CFR 1.18.
21. ☒ The Commissioner is hereby generally authorized under 37 CFR 1.136(a)(3) to treat any future reply in this or any related application filed pursuant to 37 CFR 1.53 requiring an extension of time as incorporating a request therefor, and the Commissioner is hereby specifically authorized to charge Deposit Account No. 13-2490 for any fee that may be due in connection with such a request for an extension of time.

## 22. CORRESPONDENCE ADDRESS

Name	McDonnell Boehnen Hulbert & Berghoff
Address	32 <sup>nd</sup> Floor, 300 South Wacker Drive
City, State, Zip	Chicago, Illinois 60606


## 23. SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

Name	Stephen Lesavich Registration No. P43,749
Signature	
Date	May 23, 2000

UTILITY (Rev. 11/18/97)

**CERTIFICATE OF MAILING BY "EXPRESS MAIL" UNDER 37 CFR § 1.10:** The undersigned hereby certifies that this Transmittal Letter and the paper, as described herein-above, are being deposited with the United States Postal Service with sufficient postage as "Express Mail Post Office to Addressee" in an envelope addressed to: Asst. Commissioner for Patents, Box New Application, Washington, D.C. 20231, on this **23<sup>rd</sup>** day of **May**, 2000. Express Mail No. **EL118813759US**.

By:



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

(Attorney's Docket No. 99,993)

Applicant or  
Patentee: **Spyglass, Inc.**

Serial or  
Patent No. \_\_\_\_\_

Filed or  
Issued: \_\_\_\_\_

Title: **METHOD AND SYSTEM FOR DYNAMIC FONT SUBSETTING**

**VERIFIED STATEMENT CLAIMING SMALL ENTITY STATUS  
(37 C.F.R. § 1.9(f) AND § 1.27(c)) - SMALL BUSINESS CONCERN**

I, RANDALL T. LITTLESON, hereby declare that I am

- ☐ the owner of the small business concern identified below:  
☒ an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF CONCERN: **Spyglass, Inc.**

ADDRESS OF CONCERN: **1240 East Diehl Road  
Naperville, Illinois 60563**

I hereby declare that the above-identified small business concern qualifies as a small business concern as defined in 13 C.F.R. § 121.12, and reproduced in 37 C.F.R. § 1.9(d), for purposes of paying reduced fees to the United States Patent and Trademark Office, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time, or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention, entitled **Method and System for Dynamic Font Subsetting**, by inventor(s) **Douglas R. Adler, Gregory J. Nawrocki, Peter A. Korp and Masakatsu Yoneda**.

described in

- ☒ the specification filed herewith.  
☐ Application Serial No. \_\_\_\_\_, filed \_\_\_\_\_.  
☐ Patent No. \_\_\_\_\_, issued \_\_\_\_\_.

If the rights held by the above identified small business concern are not exclusive, each individual concern or organization having rights in the invention must file verified statements averring to their status as small entities, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR § 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR § 1.9(d), or a nonprofit organization under 37 CFR § 1.9(e).

Each person, concern or organization having any rights to the invention is listed below:

- ☒ No such person, concern or organization exists.  
☐ Each such person, concern or organization is listed below.

FULL NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_

- ☐ Individual      ☐ Small Business Concern      ☐ Nonprofit Organization

FULL NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_

- ☐ Individual      ☐ Small Business Concern      ☐ Nonprofit Organization

Separate verified statements are required from each named person, concern or organization having rights in the invention averring to their status as small entities. (37 CFR § 1.27).

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the

earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 C.F.R. § 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing therein, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING: RANDALL T. LITTLESAN

TITLE IN ORGANIZATION: EVP

ADDRESS OF PERSON SIGNING: **Spyglass, Inc.**  
**1240 East Diehl Road**  
**Naperville, Illinois 60563**

Signature: Randall T. Littlesan  
Name: RANDALL T. LITTLESAN  
Title: EVP

Date: 5-23-00

**APPLICATION FOR A UNITED STATES PATENT**

UNITED STATES PATENT AND TRADEMARK OFFICE

(CASE No. 99,993)

Title: **METHOD AND SYSTEM FOR DYNAMIC FONT SUBSETTING**

5 Inventors: Douglas R. Adler, a citizen of the United States and resident of Naperville,  
Illinois;

Gregory J. Nawrocki, a citizen of the United States and a resident of Naperville,  
Illinois;

Peter A. Korp, a citizen of the United States and a resident of Naperville, Illinois;  
and

Masakatsu Yoneda, a citizen of Japan and a resident of Chiba, Japan.

10  
15  
20

Assignee: Spyglass, Inc.  
1240 E. Diehl Road  
Naperville, Illinois 60563

## COPYRIGHT AUTHORIZATION

A portion of the disclosure of this patent document contains material, which is subject to copyright protection. The copyright owner has no objection to the facsimile reproduction by anyone of the patent disclosure, as it appears in the Patent and Trademark Office patent files or records, but otherwise reserves all copyright rights whatsoever.

## FIELD OF INVENTION

This invention relates to computer networks. More specifically, it relates to a method and system for dynamic font subsetting for text in electronic content to better utilize fonts on resource constrained devices.

## BACKGROUND OF THE INVENTION

The Internet is a world-wide network of interconnected computers. The World-Wide-Web is an information system on the Internet designed for electronic document interchange. Electronic documents on the World-Wide-Web are typically stored in files that include text, hypertext, references to graphics, animation, audio, video and other electronic data. The structure of hypertext documents is defined by document markup languages such as is defined by document markup languages such as Standard Generalized Markup Language ("SGML"), Hyper Text Markup Language ("HTML"), Compact Hyper Text Markup Language ("cHTML"), eXtensible Markup Language ("XML"), Handheld Device Markup Language ("HDML"), Voice extensible Markup Language, ("VoxML"), Wireless Markup Language ("WML"), and others.

As is known in the art, a hypertext document includes markup codes called "element tags." Element tags define the structure of a hypertext document and typically includes at least a

“begin” tag name enclosed by a delimiter and, in many instances, an “end” tag name enclosed by a delimiter. For example, the markup tag “<H1>” signifies the beginning of a Hyper Text Markup Language first level header, and the markup tag “</H1>” signifies the end of a Hyper Text Markup Language first level header. However, the Hyper Text Markup Language image tag “<IMG ...>” ends with the closing tag delimiter “>” and does not use an end tag in the format “<\IMG>”. Other markup languages have similar tags used to create hypertext documents. Hereinafter, the element tags are called mark-up tags.

Markup languages allow references to additional content besides text including graphics, animation, audio, video and other electronic data. The Hyper Text Markup Language allows use of graphical images in a hypertext document with an image “<IMG>” tag. For example, an exemplary Hyper Text Markup Language image tag <IMG SRC=“logo.jpg”> allows a graphical logo image stored in a Joint Pictures Expert Group file “logo.jpg” to be displayed.

Hypertext documents from the World-Wide-Web are typically displayed for a user with a software application called a “browser” such as Internet Explorer, by Microsoft Corporation of Redmond Washington, or Netscape Navigator, by Netscape Communications of Mountain View, California, and others. A browser typically parses a hypertext document and converts hypertext, including markup tags, into a visual display of text, graphics, animation, audio, video, etc., for display on a device such as a personal computer display.

Additional content is retrieved in a hypertext document from other sources using “hyperlink” references within hypertext documents. For example, an exemplary Hyper Text Markup Language hyperlink tag



“<A HREF=“http://www.spyglass.com/logo.mov”>“ provides a hyperlink to a movie file “logo.mov.” When a user selects the link (e.g., with a mouse click) in a hypertext document, the movie file “logo.mov” is located using a Uniform Resource Locator (“URL”) from the location “www.spyglass.com.” Hyper Text Transfer Protocol is used as the transfer protocol.

5           Transfer protocols such as Hyper Text Transfer Protocol (“HTTP”), File Transfer Protocol (“FTP”), Gopher, and others provide a means for transferring hypertext documents or additional content from other locations on the World-Wide-Web. Hyper Text Transfer Protocol is one primary protocol used to transfer information on the World-Wide-Web. Hyper Text Transfer Protocol is a protocol that allows users to connect to a server, make a hypertext request, get a response, and then disconnect from the server. File Transfer Protocol is a protocol that provides access to files on remote systems. Using File Transfer Protocol, a user logs onto a system, searches a directory structure and downloads or uploads a file. Gopher is a protocol similar to File Transfer Protocol. Gopher provides a series of menus linked to files containing actual hypertext.

10  
15           Content providers on the World-Wide-Web provide custom content using attributes from markup language tags. For example, the Hyper Text Markup Language IMG tag includes the following attributes: ISMAP, a selectable image map; SRC, a source Uniform Resource Locator of an image; ALT, a text string used instead of an image; ALIGN, for alignment of an image (e.g., left, middle, right); VSPACE, the space between an image and the text above and below it; HSPACE, the space between and image and the text to its left or right; WIDTH, the width in

pixels of an image; HEIGHT, the height in pixels of an image; and a few other attributes depending on the browser being used (e.g., BORDER and LOWSRC in a Netscape browser).

In addition, other content attributes such as text can be modified using colors (e.g., TEXT="blue," or TEXT="0xa6caf0" for sky blue), font types (e.g., FONT FACE="Times Roman"), character formatting, (e.g., <B>text</B> for bold text), etc.

There are a large number of electronic devices that can be used to display electronic content from computer networks like the Internet, intranets and other computer networks. The electronic devices include personal computers, wireless telephones, personal digital assistants, handheld computers, set-top boxes and Internet appliances and other types of electronic devices.

These devices may display electronic content using one or more fonts.

As is known in the art, a "font" is a single instance of a typeface. A "typeface" refers to the style of a character or a glyph. A "character" is a member of a set of shapes used for the organization, control and representation of information. A "glyph" is a specific instance of a character.

The current generation of electronic devices suffer from a number of problems when they are used to display electronic content. One problem is that such devices typically have limited resources (e.g., memory) and may be only be able to store one or two types of fonts for one or two languages. However, electronic content provided on a computer network like the Internet, an intranet or other computer network can include virtually any font for virtually any language.

As a result, an electronic device may have to obtain additional fonts to display such electronic content.

Another problem is that a language such as Chinese, Japanese Korean, Vietnamese, etc. that use alphabets of characters including pictographs or ideographs or logographs have much larger storage requirements for their fonts. The storage requirements for such languages may vary based on the size of the corresponding character set. Individual glyphs used to create  
5 10,000 unique pictographs, ideographs or logographs can easily include 30,000 or more unique glyphs.

Another problem is that storage of a complete set of glyphs for a pictograph, ideograph or logograph based language may be prohibitive on electronic devices with limited resources such as a wireless telephone, personal digital assistant, etc. Many of the glyphs may never be  
10 used but still require storage on the electronic device if a complete set of glyphs is stored.

There have been attempts to solve some of the problems associated with using fonts and using pictograph based languages for printers. See, for example U.S. Patent No. 5,361,332, entitled "Method of Commonly Using Font Information for Outputting Information in a System Having a Plurality of Information Processing Devices," and U.S. Patent No. 5,940,581, entitled  
15 "Dynamic Font Management for Large Character Sets." However, these solutions still do not solve all of the problems associated with using glyphs on electronic devices with limited resources such as wireless phones or personal digital assistants, etc.

Thus, it is desirable to allow small electronic devices to utilize resource intensive fonts. The fonts should be useable on electronic devices with limited resources, even if the fonts don't  
20 actually reside on the electronic devices.

## SUMMARY OF THE INVENTION

In accordance with preferred embodiments of the present invention, some of the problems associated with using fonts on electronic devices are overcome. Methods and systems for dynamic font subsetting are presented.

5 One aspect of the present invention includes a method for allowing dynamic font subsetting from an intermediate network device such as a proxy server. Another aspect of the invention includes a method for providing dynamic font subsetting from an intermediate network device such as a proxy server. Another aspect of the invention includes a method for using dynamic font subsetting from a client electronic device. Another aspect of the invention includes  
10 a method for using dynamic font subsetting on an electronic device with electronic content from local storage.

One or more directives are inserted into electronic content to identify one or more glyph sub-sets needed to display the multiple characters in one or more desired languages for electronic content. A directive identifies a glyph sub-set including a set of glyphs identified in the electronic  
15 content and an encoding scheme used to encode the set of glyphs. The glyph sub-set identifies those glyphs needed to display the electronic content.

When electronic content with the one or more directives is processed the one or more directives are identified. If the electronic device does not have the glyph sub-sets needed to display the electronic content requests are sent to an intermediate network device to obtain glyph  
20 sub-sets.

These method and system may allow an electronic device with limited resources, such as a wireless telephone, personal digital assistant, network appliance, set-top box, etc., to display electronic content from a computer network such as the Internet or an intranet, with virtually any font, even if the fonts from the electronic content do not exist on the electronic device. Electronic  
5 content written in languages such as Chinese, Japanese, Korean, Vietnamese, etc. can be displayed on an electronic device with limited resources using a small number of glyphs from the multiple thousands of possible glyphs that represent characters in such languages.

The foregoing and other features and advantages of preferred embodiments of the present invention will be more readily apparent from the following detailed description. The detailed  
10 description proceeds with references to the accompanying drawings.

## BRIEF DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the present invention are described with reference to the following drawings, wherein:

FIG. 1 is a block diagram illustrating a dynamic font subsetting system;

5        FIG. 2 is a flow diagram illustrating a method for allowing dynamic font subsetting from an intermediate network device;

FIG. 3 is a flow diagram illustrating a method for providing dynamic font subsetting from an intermediate network device; and

10       FIG. 4 is a flow diagram illustrating a method for using dynamic font subsetting from a client electronic device; and

FIG. 5 is a flow diagram illustrating a method for using dynamic font subsetting with electronic content from local storage.

## DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

### **DYNAMIC FONT SUBSETTING SYSTEM**

FIG. 1 is a block diagram illustrating a dynamic font subsetting system 10. The dynamic  
font subsetting system 10 includes multiple components. However, the dynamic font subsetting  
system is not limited to these components, and more fewer or equivalent components can also be  
used for a dynamic font sub-setting system.

The dynamic font subsetting system 10 includes an electronic device 12 that requests  
electronic content including one or more font types from a computer network 14 and/or from  
local storage 16. The electronic device 12 includes, but is not limited to, electronic devices such  
as personal computers, wireless telephones, personal digital assistants, hand-held computers, set-  
top boxes, network appliances and a wide variety of other types of electronic devices.

The computer network 14 includes, but is not limited to, the Internet, an intranet, a local  
area network ("LAN") or other computer network. The local storage 16 includes, but is not  
limited to, Random Access Memory ("RAM"), Read-Only Memory ("ROM"), Flash memory, or  
other types of volatile or non-volatile storage associated with the electronic device 12.

An intermediate network device 18, such as a proxy server, services requests for  
electronic content from the electronic device 12 by obtaining the desired electronic content from  
the computer network 14. The intermediate network device 18 sends desired electronic content  
back to the electronic device 12. A database 20 associated with the intermediate network device  
18 stores sets of fonts or other information that can be sent to the electronic device 12. FIG. 1

illustrates a single intermediate network device 18 and a single database 20.

However, multiple intermediate devices 18 and multiple databases 20 can also be used.

In one embodiment of the present invention, the electronic device 12 requests/recieves electronic content from the intermediate device 18 via the computer network 14. The computer network 14 includes access to the World-Wide-Web on the Internet, an intranet, or other computer network. As is known in the art, the Internet is a world-wide network of interconnected computers. The World-Wide-Web is an information system on the Internet designed for electronic document interchange. In another embodiment of the present invention, the electronic device 12 obtains electronic content from local storage 16 instead of from the intermediate network device 18 and the computer network 14.

Electronic devices for embodiments of the present invention include electronic devices that can interact that are compliant with all or part of standards proposed by the Institute of Electrical and Electronic Engineers ("IEEE"), the International Telecommunications Union-Telecommunication Standardization Sector ("ITU"), the Internet Engineering Task Force ("IETF"), the Mobile Wireless Internet Forum, ("MWIF"), the Wireless Application Protocol ("WAP") Forum, Data-Over-Cable-Service-Interface-Specification ("DOCSIS") standards for Multimedia Cable Network Systems ("MCNS"), and other standards. However, electronic devices based on other standards could also be used and the present invention is not limited to electronic device compliant with the standards listed.

The IEEE standards can be found on the Internet at the Uniform Resource Locator ("URL") "www.ieee.org." The ITU, (formerly known as the CCITT) standards can be found at



the URL "www.itu.ch." IETF standards can be found at the URL "www.ietf.org." The WMIF standards can be found at the URL "www.wmif.org." The WAP standards can be found at the URL "www.wapforum.org." The DOCSIS standards can be found at the URL "www.cablemodem.com."

5 An operating environment for electronic devices and other components of the dynamic font subsetting system 10 for the present invention include a processing system with one or more high speed Central Processing Unit(s) ("CPU") and a memory system. In accordance with the practices of persons skilled in the art of computer programming, the present invention is described below with reference to acts and symbolic representations of instructions or operations that are performed by the processing system, unless indicated otherwise. Such acts, instructions and operations are referred to as being "computer-executed" or "CPU executed."

10 The memory system may include main memory and secondary storage. The main memory is high-speed random access memory ("RAM"). Main memory can include any additional or alternative high-speed memory device or memory circuitry. Secondary storage takes the form of persistent long term storage, such as Read Only Memory ("ROM"), optical or magnetic disks, organic memory or any other volatile or non-volatile mass storage system. 15 Those skilled in the art will recognize that the memory system can comprise a variety and/or combination of alternative components.

20 Acts and symbolically represented operations include the manipulation of electrical signals by the CPU. The electrical signals cause transformation of data bits. The maintenance of data bits at memory locations in a memory system thereby reconfigures or otherwise alters the

CPU's operation. The memory locations where data bits are maintained are physical locations that have particular electrical, magnetic, optical, or organic properties corresponding to the data bits.

The data bits may also be maintained on a computer readable medium including magnetic disks, optical disks, organic disks and any other volatile or non-volatile mass storage system readable by the CPU. The computer readable medium includes cooperating or interconnected computer readable medium, which exist exclusively on the processing system or may be distributed among multiple interconnected processing systems that may be local or remote to the processing system.

## **ELECTRONIC CONTENT**

As is known in the art and is described above, electronic content includes text, hypertext, graphical data or references to graphical data images, audio, video and other content. A hypertext document includes markup codes called "tags." The structure of hypertext documents is defined by document markup languages such as Standard Generalized Markup Language ("SGML"), Hyper Text Markup Language ("HTML"), Compact Hyper Text Markup Language ("cHTML"), eXtensible Markup Language ("XML"), Handheld Device Markup Language ("HDML"), Voice extensible Markup Language, ("VoxML"), Wireless Markup Language ("WML") and others. Markup languages also allow references to additional content besides text including graphics, animation, audio, video and other electronic data.

Also described above, electronic content is typically displayed for a user with a software application called a "browser." A browser on a hand-held device or other electronic device may

be a sub-set of a larger browser, and may not capable of displaying complete content of a requested electronic document as stored on an electronic document server. A browser typically reads an electronic document and renders the electronic document content into a visual display of text, graphics, animation, audio, video, etc., for display on a device such as a personal computer, personal digital assistant, wireless telephone, etc.

## LANGUAGE INFORMATION PROCESSING

As is known in the art, a “font” is a single instance of a typeface. A “typeface” refers to the style of a character or glyph. A “character” is a member of a set of shapes used for the organization, control and representation of information. For example, the shape representing letter “S” is a character. A “glyph” is a specific instance of a character. For example, glyphs for the shape representing the letter “S” include “S,” “ſ,” etc. Often more than one character is used for a glyph, and a glyph comprised of multiple characters is called a “ligand.” The dollar sign “\$” is an example of a ligand. The dollar sign ligand includes a glyph for an “S” character as well as a glyph for a bar “|” character.

A “character set” is a collection of characters. A “glyph set” is a collection of glyphs. The English alphabet is a character set that specifies 52 upper and lowercase letters. “Encoding” is the process of mapping a character to a numeric value. Glyph sets are encoded for use on electronic devices. Encoding is typically completed using a matrix of X-rows and Y-cells. A “row” represents values along the vertical axis in the matrix. A “cell” represents values along the horizontal axis in the matrix. In a two-byte encoding scheme a row refers to the first byte and a

cell refers to the second byte of the encoding (e.g., for Chinese, Japanese, Korean, Vietnamese, etc.).

One example of an encoding scheme is the American Standard Code for Information Interchange (“ASCII”) encoding scheme. The ASCII encoding scheme includes a character set composed of 128 characters, 94 of which are considered printable. Non-printable control characters are encoded with values of 0-31 (decimal), the space character is encoded as a value of 32, the graphic characters are encoded with values from 33-126 and the delete character is encoded as a value of 127. ASCII encoding uses a designated bit pattern encoding scheme in the lower seven bits of one eight-bit byte with the eighth bit set to a value of zero. For example, the character for uppercase “A” has encoding value of 64 in decimal and a bit encoding of 0100-0001 in binary. The character for uppercase “B” has a decimal value of 65 in decimal and bit encoding of 0100-0010 in binary, etc. In this example, the ASCII codes can be represented in a matrix with a row indicated by the first four bits (e.g., 01000) and a cell indicated the second four bits (e.g., 0001 and 0010).

As another example, as is known in the art, the “Big-Five” encoding scheme is used for encoding Chinese characters. The Big-Five name refers to the five companies that collaborated in its development. The Big-Five encoding scheme uses a predetermined encoding scheme in two eight-bit bytes using a disjoint matrix. The Big-Five character encoding space is set into a disjoint matrix of 94x517 with a capacity of 14,758 characters.

Character set standards have been created to manage characters. The character standards are typically maintained by a government or a government-sanctioned organization within a

given country. For example, the “JIS X 0208:1997” character set is a Japanese standard character set standard with 6,879 characters, the “TCVN 6056:1995” character set is a Vietnamese standard character set with 3,311 characters, etc.

An output device such as a display or printer uses the numerical encoded values as well as the encoding scheme to display glyphs and ligands in a character set. The numerical encoded values and the encoding scheme are typically used to locate instructions to render glyphs and ligands as outlines into bitmaps of the appropriate size and resolution for display. The bitmaps typically are used to turn pixels (for display units) or dots (for printers) on to allow glyphs and ligands to be viewed.

As an example, electronic content, such as HTML, etc. includes multiple ASCII encoded characters. The ASCII encoded characters are stored for the electronic content as a series of ASCII codes on an electronic device. For example, the word “HI” is stored as ASCII encoded values 72 and 73 in decimal. When an application, such as a browser, desires to display the ASCII encoded information, the ASCII encoded values of 72 and 73 are read, the ASCII encoding scheme and an ASCII matrix is used to locate instructions to display glyphs including patterns for that make up the characters “H” and “I” on a display device.

For more information on language information processing see, “CJKV (Chinese, Japanese, Korean, Vietnamese) Information Processing,” by Ken Lunde, O’Reilly & Associates, Inc., Sebastopol, California, ISBN 1-56592-224-7, January 1999, incorporated herein by reference.

## ALLOWING DYNAMIC FONT SUBSETTING FROM AN INTERMEDIATE NETWORK DEVICE

FIG. 2 is a flow diagram illustrating a Method 22 for allowing dynamic font subsetting from a server device. At Step 24, a first request is received on an intermediate network device from an electronic device for electronic content including a multiple characters in one or more desired languages. At Step 26, the requested electronic content is obtained on the intermediate network device from a computer network. At Step 28, the electronic content is scanned to identify one or more sets of glyphs in the electronic content used for the multiple characters in the one or more desired languages. At Step 30, one or more glyph sub-sets are created for the identified one or more sets of glyphs. The one or more glyph sub-sets include only glyphs identified in the requested electronic content. At Step 32, one or more directives are inserted in the requested electronic content to identify the one or more glyph sub-sets needed to display the multiple characters in one or more desired languages in the requested electronic content, thereby creating modified electronic content. A directive identifies a glyph sub-set including set of glyphs identified in the electronic content and an encoding scheme used to encode the set of glyphs. At Step 34, the modified electronic content is sent to the electronic device.

Method 24 is illustrated with one specific embodiment of the present invention. However, the present invention is not limited to such an embodiment. In such a specific embodiment, at Step 24, an HTTP request is received on a proxy server 18 from an electronic device 12 for electronic content including a multiple Chinese characters.

In such an embodiment of the present invention, the requested electronic content is written in a mark-up language including SGML, HTML, cHTML, XML, HDML, VoxML, WML, or other markup languages. However, the present invention is not limited to electronic content written in these mark-up languages and other types of electronic content can also be used.

Aspects of one specific illustrative embodiment of the present invention are illustrated for Method 22 and electronic content provided in HTML. HTML is described in the IETF Request For Comments ("RFC") 2068, incorporated herein by reference. However, the present invention is not limited to these specific illustrative embodiments and other embodiments can also be used.

At Step 26, the requested electronic content is obtained on a proxy server 18 from the Internet, or an intranet 14. At Step 28, the electronic content is scanned to identify one or more sets of glyphs in the electronic content used for the multiple characters in the one or more desired languages. Table 1 illustrates an exemplary HTML document obtained by the proxy server 18.

<pre>&lt;HTML&gt; &lt;HEAD&gt; &lt;META HTTP-EQUIV="Content-Type" CONTENT="text/html"; CHARSET=Big5"&gt; &lt;/HEAD&gt; &lt;BODY&gt; &lt;H1&gt;CG1 CG2 CG3 CG4 &lt;/BODY&gt; &lt;/HTML&gt;</pre>
---

Table 1.

Table 1 illustrates an exemplary HTML document obtained from the Internet 14. As is known in the art, HTML META tags are used to specify information about an HTML document. The HTML META tags are used in a HTML document header defined by the HTML <HEAD> and

</HEAD> mark-up tags. The META tag in Table 1 indicates the HTML document is HTML text and the character set and encoding that is used for the Chinese glyphs (e.g., CG1, CG2, CG3 and CG4) in the document is Big5. The monikers CGx, where x = 1, 2, 3, ..., are used in place of the actual Chinese glyphs for the sake of simplicity.

5           At Step 28, the electronic content (e.g., Table 1) is scanned to identify multiple numeric Big-Five codes for the Chinese glyphs CG1, CG2, CG3 and CG4. The META tag in Table 1 may be used to help identify what character set(s) are included in the electronic content (e.g., Big5).

10           At Step 30, one or more glyph sub-sets are created for the identified one or more sets of glyphs. The one or more glyph sub-sets include only glyphs identified in the requested electronic content. For example, a glyph sub-set called "Big5" is created including only the four identified Chinese glyphs CG1, CG2, CG3, and CG4.

15           As was discussed above, the whole Big5 character set includes 14,758 possible Chinese characters. Only four glyphs representing four characters from the set of 14,758 characters are included in the glyph sub-set called Big5. The remaining 14,754 characters are not necessary to display the electronic content illustrated in Table 1, so these characters are not added to the glyph sub-set.

20           In one embodiment of the present invention, the glyph sub-set is created with the same name as the name used for the original character set (e.g., Big5). In such an embodiment, display software used on the electronic device 12 would not have to be modified to display the glyph sub-set. For example, if the electronic device 12 included an Internet browser with an



application to display glyphs for characters in the Big-Five character set from a file called  
“Big5” then the glyph sub-set could be created and stored in a file with the name “Big5.” This  
allows the display software to read a file called Big5 to display Chinese characters that may  
include a glyph sub-set created by Method 24, or the glyphs for full set of 14,000+ Chinese  
5 characters.

In another embodiment of the present invention, the glyph sub-set is created with a name  
different from the original character set. In such an embodiment, a new name may be selected to  
go along with a new encoding scheme. For example, if only four Chinese glyphs were to be  
display (e.g., those from Table 1) a glyph sub-set called “Big5-1” may be created including only  
10 the four identified Chinese glyphs. The four glyphs could then be stored in a compressed or  
altered matrix or other encoding table instead of the disjoint matrix of 94x517 rows and cells  
required for Big5 Chinese characters. This embodiment may save additional storage space on  
the electronic device 12 and make transmission of a glyph sub-set to the electronic device 12  
faster.

In such an embodiment, the encoding scheme may also be altered to properly decode  
15 identifiers (e.g., numerical values) for the identified Chinese glyphs. For example, suppose the  
four identified Chinese glyphs were assigned numerical values in the glyph sub-set of 1, 2, 3 and  
4 decimal and stored in a compressed matrix with one row and four cells. The encoding scheme  
identified (e.g., Big5-1-encode) would then be used to map the numerical values of 1, 2, 3 and 4  
20 from the compressed matrix into the uncompressed matrix of 96x517 rows and cells used to  
display glyphs for Big5 Chinese characters.

In one embodiment of the present invention, at Step 30, one or more glyph sub-sets are created for Chinese, Japanese, Korean, Vietnamese, Hebrew or Arabic glyphs. However, the present invention is not limited to such an embodiment and one or more glyph sub-sets can be created for virtually any language (e.g., English).

At Step 32, one or more directives are inserted in the requested electronic content to identify the one or more glyph sub-sets needed to display the multiple characters in one or more desired languages in the requested electronic content, thereby creating modified electronic content. A directive identifies glyph sub-set includes a set of glyphs identified in the electronic content and an encoding scheme used to encode the set of glyphs.

In one embodiment of the present invention, a directive is an additional HTML META tag. However the directive is not limited to a HTML META tag and other types of directives can also be used. Table 2 illustrates exemplary directives used in a HTML document.

```

© 1999 by Spyglass, Inc.
<HEAD>
...
<META type="glyph-subset-x" type="encoding-x" src=url>
<META type="glyph-subset-y" type="encoding-y" src=url>

<META type="glyph-subset-z" src="url">
<META type="encoding-z" src=url>
...
</HEAD>

```

Table 2.

As is illustrated in Table 2, a directive identifies glyph set and encoding scheme used to display the set of glyphs. The first portion of the directive includes a "type=" attribute that

identifies a glyph sub-set. The second portion of the directive includes a "type=" attribute that identifies an encoding scheme used to encode the set of glyphs. The third portion of the directive includes a "src=" directive that identifies a source to locate the set of glyphs (e.g., intermediate device 18 ). The "src=" directive may include a URL, an actual network address (e.g., IP or MAC), a port number (e.g., HTTP port 80) or other identifier used to locate the set of glyphs.

The directive may include information about the set of glyphs and the encoding scheme as well as the source in one single directive or may be split among several directives as is also illustrated in Table 1. For example, one directive may include an identifier for glyph sub-set (e.g., glyph-subset-z) while a second directive may include the encoding scheme (e.g., encoding-z) used to encode the set of glyphs for that identifier.

Table 3 illustrates the modified electronic content including one exemplary directive that may be used to identify glyph sub-set representing the Chinese characters in the original electronic content illustrated in Table 1. However, the present invention is not limited to using one directive for the Chinese language and multiple directives may be used in electronic content to identify one or more different encoding scheme or one or more different glyph sub-sets for characters for multiple different languages. For example, multiple directives for multiple different glyph sub-sets may be used by a network appliance that may display electronic content in multiple languages (e.g., an electronic information kiosk in an airport).

© 1999 by Spyglass, Inc.

<HEAD>

<META HTTP-EQUIV="Content-Type" 'CONTENT=text/html; CHARSET=Big5">

<META TYPE="Big5" "SRC=http://proxy\_server/Big5">

<META TYPE="Big5-encode" "SRC=http://proxy\_server/Big5/Big5-encode">

</HEAD>

BODY> <H1>CG1 CG2 CG3 CG4 </BODY> </HTML>
--

Table 3.

At Step 34, the modified electronic content illustrated in Table 3 is sent to the electronic device 12.

In another embodiment of the present invention, the intermediate network device 18 does not scan or modify the electronic content to include the directives. The one or more directives are included by the author of the electronic content. In such an embodiment, the electronic device is used to obtain electronic content including the directives from the computer network 14.

In another embodiment of the present invention, the electronic device 12 reads electronic content including the directives from local storage 16 and does not use intermediate network device 18 or computer network 14. In such an embodiment, the electronic content includes directives created by the author of the electronic content. Further details of such an embodiment are explained below.

Method 24 can be used to allow an electronic device 12 to display electronic content for virtually any language by providing only a small sub-set of glyphs that are required to display the electronic content. For example, Method 24 can be used with electronic content written in English. However, Method 24 may provide a larger saving of resources for languages with a large number of possible characters (e.g., Chinese, Japanese, Korean, Vietnamese, etc.)

## PERFORMING DYNAMIC FONT SUBSETTING FROM AN INTERMEDIATE NETWORK DEVICE

FIG. 3 is a flow diagram illustrating a Method 36 for performing dynamic font subsetting from an intermediate network device. At Step 38, one or more requests are received on an intermediate network device from an electronic device requesting one or more glyph sub-sets needed to display modified electronic content on the electronic device. The one or more requests are generated by the electronic device as a result of one or more directives inserted into the modified electronic content by the intermediate network device. The one or more directives identifies a glyph sub-set including a set of glyphs identified in the modified electronic content and an encoding scheme used to encode the set of glyphs. At Step 40, the one or more glyph sub-sets are obtained. At Step 42, the one or more glyph sub-sets are sent to the electronic device to allow the electronic device to display one or more glyphs in the modified electronic content.

Method 36 is illustrated with one specific embodiment of the present invention. However, the present invention is not limited to such an embodiment. In such a specific embodiment, At Step 38, one or more HTTP requests are received on an a proxy server 16 from an electronic device 12 requesting one or more glyph sub-sets needed to display modified electronic content (e.g., from Table 3) on the electronic device 12. The one or more requests are generated by the electronic device 12 as a result of one or more directives inserted into the modified electronic content by the proxy server 18 (e.g., with Method 24). The one or more

directives identifies a glyph sub-set (e.g., Big5) including a set of glyphs identified in the modified electronic content and an encoding scheme used to encode the set of glyphs.

At Step 40, the one or more glyph sub-sets are obtained by the proxy server 18. In one embodiment of the present invention, the proxy server 18 obtains the one or more glyph sub-sets from the database 20. In another embodiment of the present invention, the proxy server 18 may obtain the one or more glyph sub-sets from other locations on the computer network 14. In yet another embodiment of the present invention, the proxy server 18 may obtain some of the glyph subsets from the database 20 and other glyph sub-sets from other locations on the computer network 14.

In one embodiment of the present invention, the one or more glyph sets are obtained regardless of what glyph sub-sets may already exist on the electronic device 12. In another embodiment of the present invention, Step 40 includes consulting a database associated with intermediate network device to determine what glyph sub-sets already exist on the electronic device. In such an embodiment, the electronic device may be identified by a device type identifier included in a header associated with a request. Only those glyphs that do not already exist on the electronic device are obtained at Step 40.

At Step 42, the one or more glyph sub-sets (e.g., Big5) are sent to the electronic device 12 to allow the electronic device to display one or more glyphs in the modified electronic content (e.g., Table 3). In one embodiment of the present invention, the multiple requests received at Step 38 could include multiple requests for one or more glyph sub-sets each including a small number of glyphs and stored in a file called Big5. A file named "Big5" is then sent multiple

times. Even though the file name was the same (i.e., Big5), the one or more Big5 files included different sets of glyphs. The multiple files may come from the same location (e.g., proxy server 18) or multiple different locations. In addition, the multiple files with the same names could also use the same encoding scheme or different encoding schemes as is indicated in the directives.

5 In another embodiment of the present invention, the multiple requests received at Step 38 could include multiple requests for multiple glyph sub-sets for multiple languages or the same language but include requests for glyph sub-sets with special encoding schemes (e.g., a compressed matrix).

### **DYNAMIC FONT SUBSETTING FROM A CLIENT ELECTRONIC DEVICE**

10 FIG. 4 is a flow diagram illustrating a Method 44 for using dynamic font subsetting from a client electronic device. At Step 46, a first request is sent from an electronic device to an intermediate network device for electronic content on a computer network. At Step 48, modified electronic content is received from the intermediate network device on the electronic device. The modified electronic content includes one or more directives. A directive identifies a glyph sub-  
15 set including a set of glyphs identified in the modified electronic content and an encoding scheme used to encode the set of glyphs. At Step 50, the modified electronic content is processed, thereby identifying the one or more directives. At Step 52, one or more second requests are sent to the intermediate network device based on the one or more identified directives to request one or more glyph sub-sets to allow the electronic device to display the  
20 modified electronic content. At Step 54, one or more glyph sub-sets are received from the

intermediate network device. At Step 56, the modified electronic content is displayed using the one or more glyph sub-sets.

Method 44 is illustrated with one specific embodiment of the present invention.

However, the present invention is not limited to such an embodiment. In such a specific

5 embodiment, at Step 46 a first HTTP request is sent from the electronic device 12 the proxy server 18 for electronic content on a computer network 14. At Step 48, modified electronic content (e.g., Table 3) is received from the proxy server 18 on the electronic device. The modified electronic content includes one or more directives. The modified electronic content could be modified by intermediate network device 18 using Method 24 or by an author of the  
10 electronic content. At Step 50, the modified electronic content is processed, thereby identifying the one or more directives. At Step 52, one or more HTML META tag requests are sent to the intermediate network device based on the one or more identified directives to request one or more glyph sub-sets (e.g., Big5 including the Chinese glyphs CG1-CG4) to allow the electronic device 12 to display the modified electronic content. At Step 54, one or more glyph sub-sets are  
15 received from the intermediate network device (e.g., the Big5 sub-set including the Chinese glyphs CG1-CG4). At Step 56, the modified electronic content is displayed on the electronic device 12 using the one or more glyph sub-sets.

Thus, the electronic device 12 is able to display the electronic content including the four Chinese glyphs CG1-CG4 even the electronic device 12 did not originally include any Chinese  
20 glyphs. The electronic device 12 is able to display the electronic content with the four Chinese glyphs without downloading all 14,000+ Big5 Chinese glyphs.



## DYNAMIC FONT SUBSETTING WITH ELECTRONIC CONTENT FROM LOCAL STORAGE

FIG. 5 is a flow diagram illustrating a Method 58 for using dynamic font subsetting with electronic content from local storage. At Step 60, electronic content is read from local storage on an electronic device. The electronic content includes one or more directives. The directives were added to the electronic content by an author of the electronic content. A directive identifies a glyph sub-set including a set of glyphs identified in the electronic content and an encoding scheme used to encode the set of glyphs. At Step 62, the electronic content is processed on the electronic device, thereby identifying the one or more directives. At Step 64, a test is conducted to determine from the one or more directives whether a desired glyph sub-set can be obtained from local storage on the electronic device. If a desired glyph sub-set can be obtained from local storage on the electronic device, Step 70 is executed. If a desired glyph sub-set can not be obtained from local storage on the electronic device, at Step 66 requests are sent to an intermediate network device to obtain glyph sub-sets that can not be obtained from local storage. At Step 68 the glyph sub-sets that can not be obtained from local storage are obtained from the intermediate network device. At Step 70, the electronic content is displayed using the one or more glyph sub-sets from local storage or from the intermediate network device.

Method 58 is illustrated with one specific embodiment of the present invention.

However, the present invention is not limited to such an embodiment. In such a specific

embodiment, at Step 60, an HTML document is read from local storage 16 on an electronic device 12. The HTML document includes one or more directives. At Step 62, the HTML

document is processed on the electronic device 12, thereby identifying the one or more directives. At Step 64 a test is conducted to determine from the one or more directives whether a desired glyph sub-set can be obtained from RAM on the electronic device 12. If a desired glyph sub-set can not be obtained from RAM on the electronic device 12, at Step 66 requests are sent to a proxy server 18 to obtain glyph sub-sets that can not be obtained from RAM. At Step 68, the glyph sub-sets that can not be obtained from RAM are obtained from the proxy server 18. At Step 70, the HTML document is displayed using the one or more glyph sub-sets obtained from the proxy server 18.

These methods and system described herein may allow an electronic device with limited resources to display electronic content from a computer network such as the Internet or an intranet or from local storage with virtually any font type, even if the fonts from the electronic content do not exist on the electronic device. The fonts can be used to display text from an electronic document as well as for text for other media types (e.g., text added to a frame from a video stream, etc.).

Fonts are displayed using glyph sub-sets for characters from one or more languages identified in electronic content. Such glyph sub-sets include a small number of the many thousands of possible glyphs (e.g., Chinese, Japanese, Korean, Vietnamese, Hebrew or Arabic glyphs) available to display characters for such languages. However, glyph sub-sets for characters from virtually any language can be used with electronic devices with limited resources.

It should be understood that the programs, processes, methods and system described herein are not related or limited to any particular type of computer or network system (hardware or software), unless indicated otherwise. Various types of general purpose or specialized computer systems may be used with or perform operations in accordance with the teachings described herein.

In view of the wide variety of embodiments to which the principles of the present invention can be applied, it should be understood that the illustrated embodiments are exemplary only, and should not be taken as limiting the scope of the present invention. For example, the steps of the flow diagrams may be taken in sequences other than those described, and more or fewer elements may be used in the block diagrams. While various elements of the preferred embodiments have been described as being implemented in software, in other embodiments hardware, firmware, or other implementations may alternatively be used including combinations thereof.

The claims should not be read as limited to the described order or elements unless stated to that effect. Therefore, all embodiments that come within the scope and spirit of the following claims and equivalents thereto are claimed as the invention.

**WE CLAIM:**

1. A method for dynamic font subsetting, comprising:

receiving a first request on an intermediate network device from an electronic device for electronic content including a plurality characters in one or more desired languages;

5 obtaining the requested electronic content on the intermediate network device from a computer network;

scanning the electronic content to identify one or more sets of glyphs in the electronic content used for the plurality of characters in the one or more desired languages;

creating one or more glyph sub-sets for the one or more identified sets of glyphs, wherein the one or more glyph sub-sets include only glyphs identified in the requested electronic content;

10 inserting one or more directives in the requested electronic content to identify the one or more glyph sub-sets needed to display the plurality of characters in the one or more desired languages in the requested electronic content, thereby creating modified electronic content, wherein a directive identifies a glyph sub-set including a set of glyphs identified in the electronic content and an encoding scheme used to encode the set of glyphs; and

15 sending the modified electronic content to the electronic device.

2. A computer readable medium having stored therein instructions for causing a central processing unit for executing the method of Claim 1.

3. The method of Claim 1 wherein the step of receiving a first request on an intermediate network device from an electronic device for electronic content includes receiving a request for electronic content written in a mark-up language including Standard Generalized Markup Language, Hyper Text Markup Language, Compact Hyper Text Markup Language, eXtensible Markup Language, Handheld Device Markup Language, Voice Extensible Markup Language, or Wireless Markup Language.

4. The method of Claim 1 wherein the step of creating one or more glyph sub-sets includes creating one or more glyph sub- sets for Chinese, Japanese, Korean, Vietnamese, Hebrew or Arabic glyphs.

5. The method of Claim 1 wherein the computer network includes the Internet, an intranet or a local area network.

6. The method of Claim 1 wherein the electronic device includes a personal computer, wireless telephone, personal digital assistant, hand-held computer, set-top box, or network appliance.

7. The method of Claim 1 wherein the step of inserting one or more directives in the requested electronic content includes inserting one or more directives as Hyper Text Markup Language META tags into a Hyper Text Markup Language header associated with the requested electronic content.

8. A method for dynamic font subsetting, comprising:

receiving one or more requests on an intermediate network device from an electronic device requesting one or more glyph sub-sets needed to display modified electronic content, wherein the one or more requests are generated by the electronic device as a result of one or more directives inserted into the modified electronic content by the intermediate network device, wherein the one or more directives identifies a glyph sub-set including a set of glyphs identified in the modified electronic content and an encoding scheme used to encode the set of glyphs;

obtaining the one or more glyph sub-sets;

sending the one or more glyph sub-sets to the electronic device to allow the electronic device to display glyphs in the modified electronic content.

9. A computer readable medium having stored therein instructions for causing a central processing unit for executing the method of Claim 8.

10. The method of Claim 8 wherein the step obtaining one or more glyph subsets

5 includes obtaining the one or more glyph sets from a database associated with the intermediate network device.

11. The method of Claim 8 wherein step of obtaining one or more glyph subsets includes consulting a database associated with the intermediate network device to determine what

10 glyph sub-sets, if any, may already exist on the electronic device; and

creating one or more glyph sub-sets including sets of glyphs that do not already exist on the electronic device needed to display the modified electronic content on the electronic device.

12. The method of Claim 8 wherein the step of wherein step of obtaining one or more

15 glyph subsets includes

creating a database entry for the electronic device in a database associated with the intermediate, wherein the database entry includes an identifier for the electronic device and a list of one or more glyph sub-sets sent to the electronic device by the intermediate network device.

20 13. The method of Claim 8 wherein the step of receiving one or more requests includes receiving one or more requests for modified electronic content including one or more directives

written in a mark-up language including Standard Generalized Markup Language, Hyper Text Markup Language, Compact Hyper Text Markup Language, eXtensible Markup Language, Handheld Device Markup Language, Voice Extensible Markup Language, or Wireless Markup Language.

5

14. The method of Claim 8 wherein the step of obtaining one or more glyph sub-sets includes obtaining one or more glyph sub-sets for Chinese, Japanese, Korean, Vietnamese, Hebrew or Arabic glyphs.

15. A method for dynamic font subsetting, comprising:

10 sending a first request from an electronic device to an intermediate network device for electronic content on a computer network;

15 receiving modified electronic content from the intermediate network device on the electronic device, wherein the modified electronic content includes one or more directives, wherein a directive identifies a glyph sub-set including a set of glyphs identified in the modified electronic content and an encoding scheme used to encode the set of glyphs;

20 processing the modified electronic content, thereby identifying the one or more directives;

25 sending a plurality of second requests to the intermediate network device based on the one or more identified directives to request one or more glyph sub-sets to allow the electronic device to display the modified electronic content;



receiving one or more glyph sub-sets from the intermediate network device; and  
displaying the modified electronic content using the one or more glyph sub-sets.

16. A computer readable medium having stored therein instructions for causing a central  
5 processing unit to execute the method of claim 15.

17. The method of Claim 15 wherein the electronic device includes personal computers,  
wireless telephones, personal digital assistants, hand-held computers, set-top boxes or network  
appliances.

18. The method of Claim 15 wherein the step of receiving modified electronic content  
includes receiving modified electronic content with a plurality of font tags written in a mark-up  
language including Standard Generalized Markup Language, Hyper Text Markup Language,  
Compact Hyper Text Markup Language, eXtensible Markup Language, Handheld Device  
Markup Language, Voice Extensible Markup Language, or Wireless Markup Language.  
15

19. The method of Claim 15 wherein the step of receiving one or more glyph sub-sets  
from the intermediate network device includes receiving one or more glyph sub-sets including  
Chinese, Japanese, Korean, Vietnamese, Hebrew or Arabic glyphs.

20. The method of Claim 15 wherein the step of processing the modified electronic content, includes identifying one or more directives as Hyper Text Markup Language META tags in a Hyper Text Markup Language header associated with the modified electronic content.

5 21. The method of Claim 15 wherein the electronic device includes a personal computer, wireless telephone, personal digital assistant, hand-held computer, set-top box, or network appliance.

22. A method for dynamic font subsetting, comprising:

10 reading electronic content from local storage on an electronic device, wherein the electronic content includes one or more directives, wherein a directive identifies a glyph sub-set including a set of glyphs identified in the electronic content and an encoding scheme used to encode the set of glyphs;

15 processing the electronic content on the electronic device, thereby identifying the one or more directives;

determining from the one or more directives whether a desired glyph sub-set can be obtained from local storage on the electronic device, and if not,

sending requests to an intermediate network device to obtain glyph sub-sets that can not be obtained from local storage on the electronic device;

20 receiving the glyph sub-sets that can not be obtained from local storage from the intermediate network device on the electronic device; and

displaying the electronic content on the electronic device using the glyph sub-sets  
obtained from the intermediate network device.

23. A computer readable medium having stored therein instructions for causing a central  
5 processing unit to execute the method of Claim 22.

24. The method of Claim 22 wherein the one or more glyph sub-sets include Chinese,  
Japanese, Korean, Vietnamese, Hebrew or Arabic glyphs.

25. The method of Claim 22 wherein the step of processing the electronic content,  
10 includes identifying one or more directives as Hyper Text Markup Language META tags in a  
Hyper Text Markup Language header associated with the modified electronic content.

26. The method of Claim 22 wherein the electronic device includes a personal computer,  
wireless telephone, personal digital assistant, hand-held computer, set-top box, or network  
15 appliance.

27. The method of Claim 22 further comprising:  
determining from the one or more directives whether a desired glyph sub-set can be  
obtained from local storage on the electronic device, and if so,  
20 displaying the electronic content on the electronic device using the one or more glyph  
sub-sets obtained from local storage.

28. A dynamic font subsetting system, comprising in combination:

a plurality of directives for identifying a glyph sub-set including a set of glyphs identified in electronic content and an encoding scheme used to encode the set of glyphs, wherein the set of glyphs are used display a plurality of characters in one or more desired languages for the electronic content;

electronic content including one or more directives for identifying one or more glyph sub-sets including sets of glyphs identified in the electronic content and encoding schemes used to encode the sets of glyphs; and

an electronic device for displaying electronic content including one or more directives, wherein the electronic device has limited resources can not store all glyphs for all characters in a desired language.

29. The dynamic font subsetting system of Claim 28 further comprising:

an intermediate network device for receiving a first request on an intermediate network  
device from an electronic device for electronic content including a plurality characters in one or  
more desired languages, obtaining the requested electronic content on the intermediate network  
device from a computer network, scanning the electronic content to identify one or more sets of  
glyphs in the electronic content used for the plurality of characters in the one or more desired  
languages, creating one or more glyph sub-sets for the one or more identified sets of glyphs,  
wherein the one or more glyph sub-sets include only glyphs identified in the requested electronic  
content, inserting one or more directives in the requested electronic content to identify the one or  
more glyph sub-sets needed to display the plurality of characters in the one or more desired  
languages in the requested electronic content, thereby creating modified electronic content,  
wherein a directive identifies a glyph sub-set including a set of glyphs identified in the electronic  
content and an encoding scheme used to encode the set of glyphs, sending the modified  
electronic content to the electronic device; and for obtaining one or more glyph sub-sets for an  
electronic device and sending the one or more glyph sub-sets to the electronic device to allow the  
electronic device to display glyphs in the modified electronic content.


30. The dynamic font subsetting system of Claim 29 further comprising:

a database associated with the intermediate network device for storing one or more glyph sub-sets including sets of glyphs obtained or created by the intermediate network device needed to display the modified electronic content on the electronic device and for storing database entries for a plurality of electronic devices wherein the database entries include an identifier for the electronic device and a list of one or more glyph sub-sets obtained or created by the intermediate network device for the electronic device.

## ABSTRACT OF THE DISCLOSURE


Methods and system for dynamic font subsetting. One or more directives are inserted into electronic content to identify one or more glyph sub-sets needed to display the multiple characters in one or more desired languages for electronic content. A directive identifies a glyph sub-set including set of glyphs identified in the electronic content and an encoding scheme used to encode the set of glyphs. The glyph sub-set identifies only those glyphs needed to display the electronic content. When electronic content with the one or more directives is processed the one or more directives are identified. If the electronic device does not have the glyph sub-sets needed to display the electronic content, requests are sent to an intermediate network device to obtain glyph sub-sets. These method and system may allow an electronic device with limited resources, such as a wireless telephone, personal digital assistant, network appliance, set-top box, etc., to display electronic content from a computer network such as the Internet or an intranet, with virtually any font, even if the fonts from the electronic content do not exist on the electronic device. Electronic content written in languages such as Chinese, Japanese, Korean, Vietnamese, etc. can be displayed on an electronic device with limited resources using a small number of glyphs from the multiple thousands of possible glyphs that represent characters in such languages.

**FIG. 1**

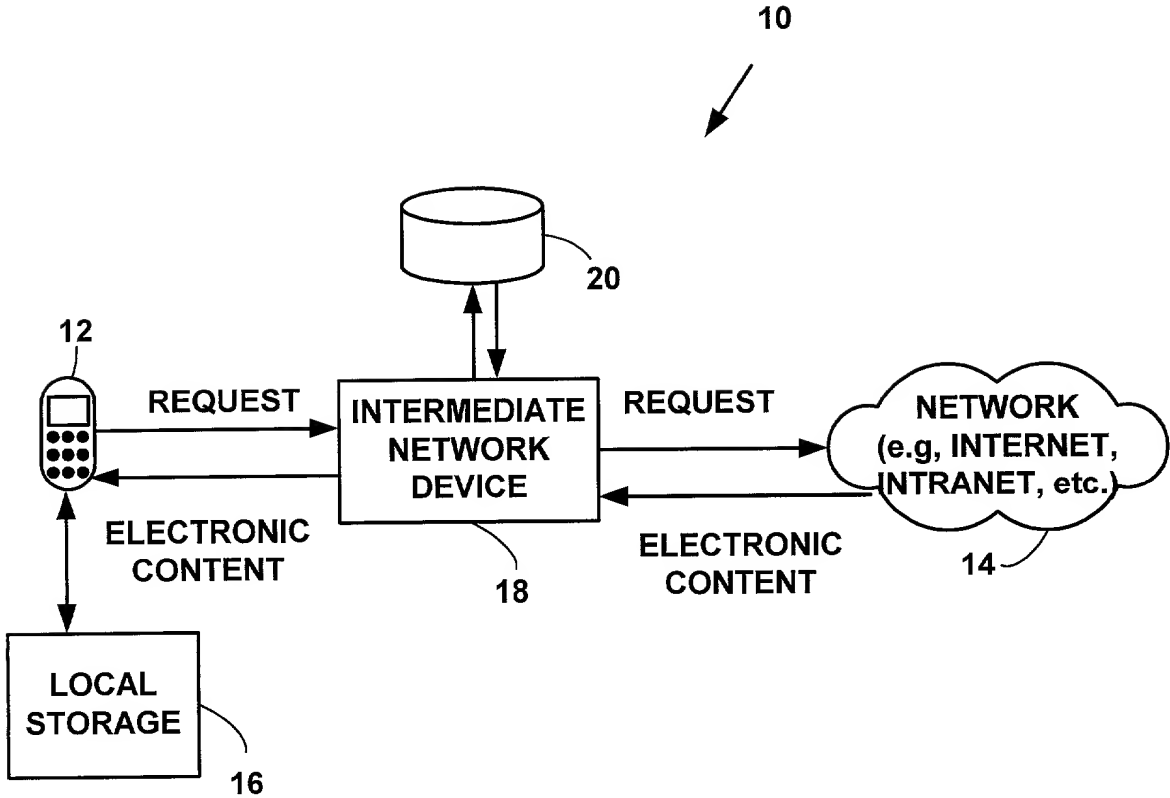





**FIG. 2**

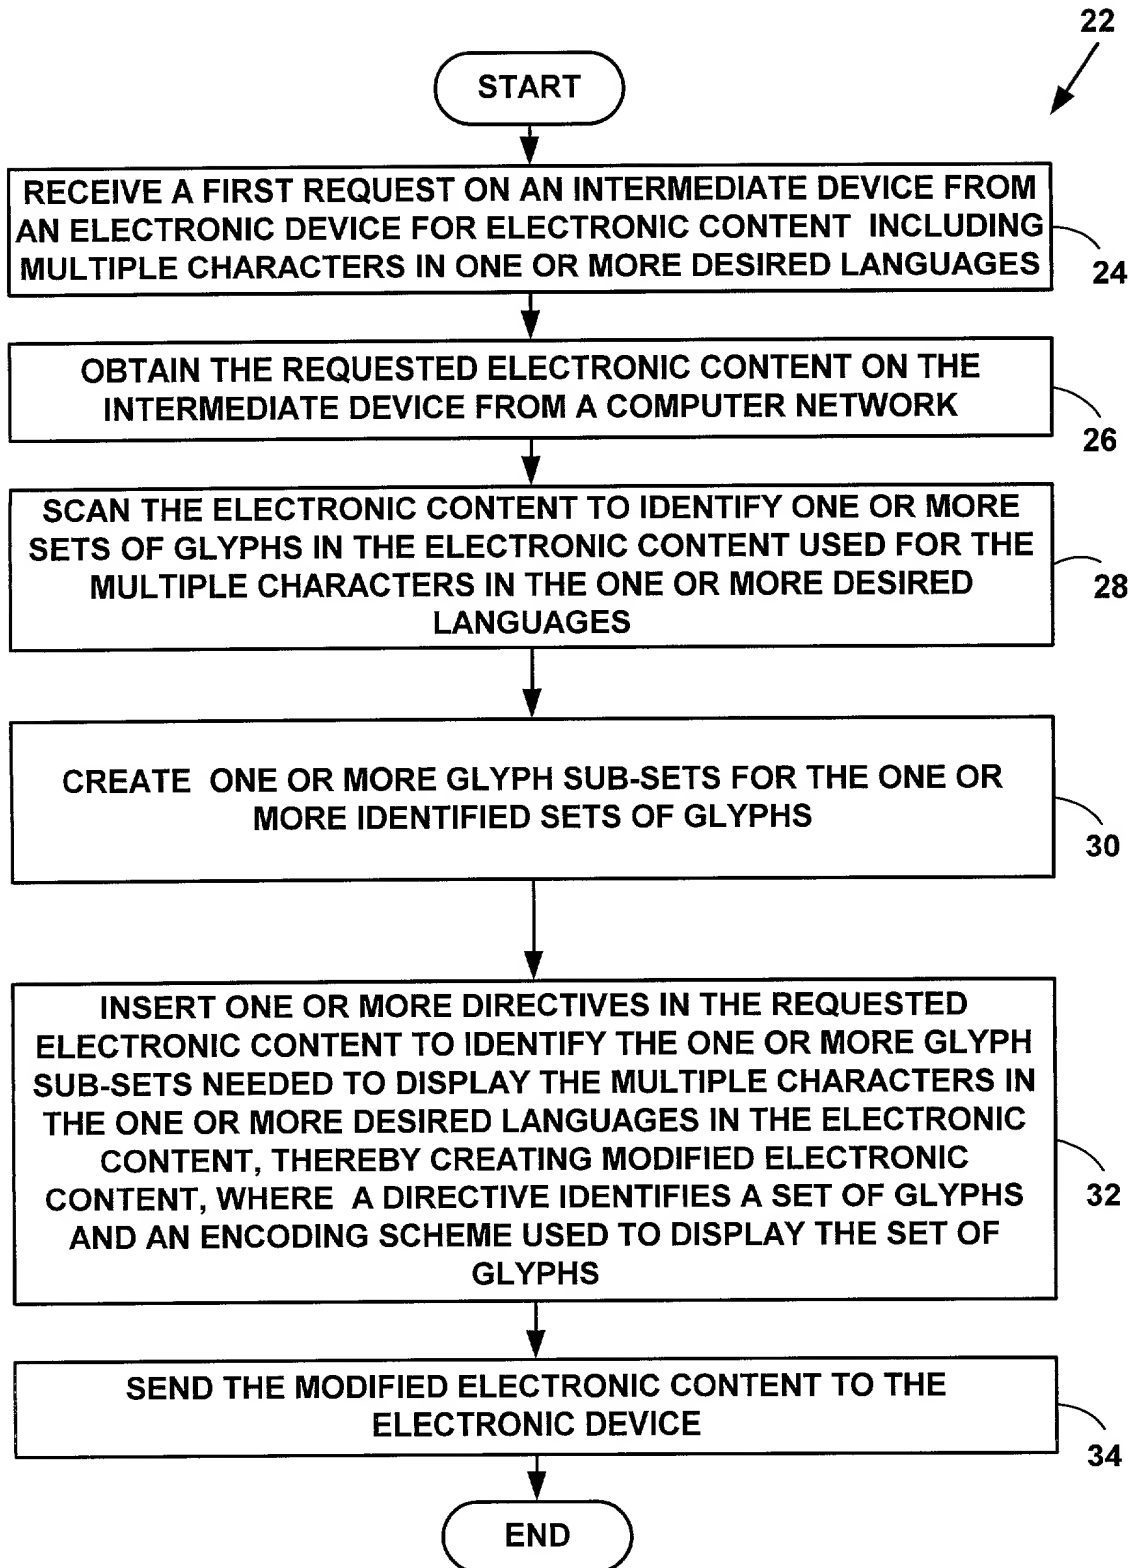


**FIG. 3**

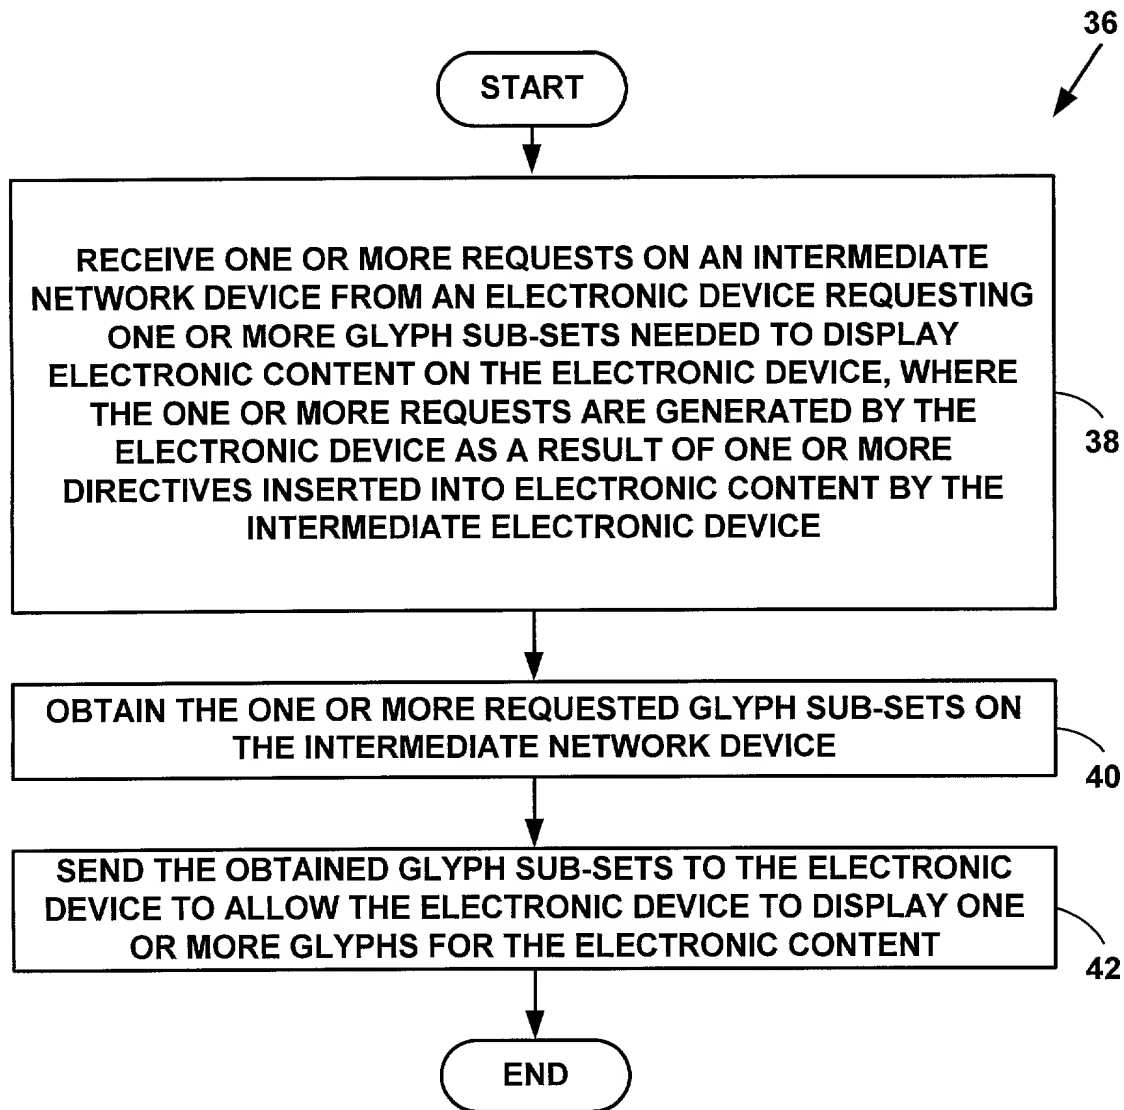

**FIG. 4**

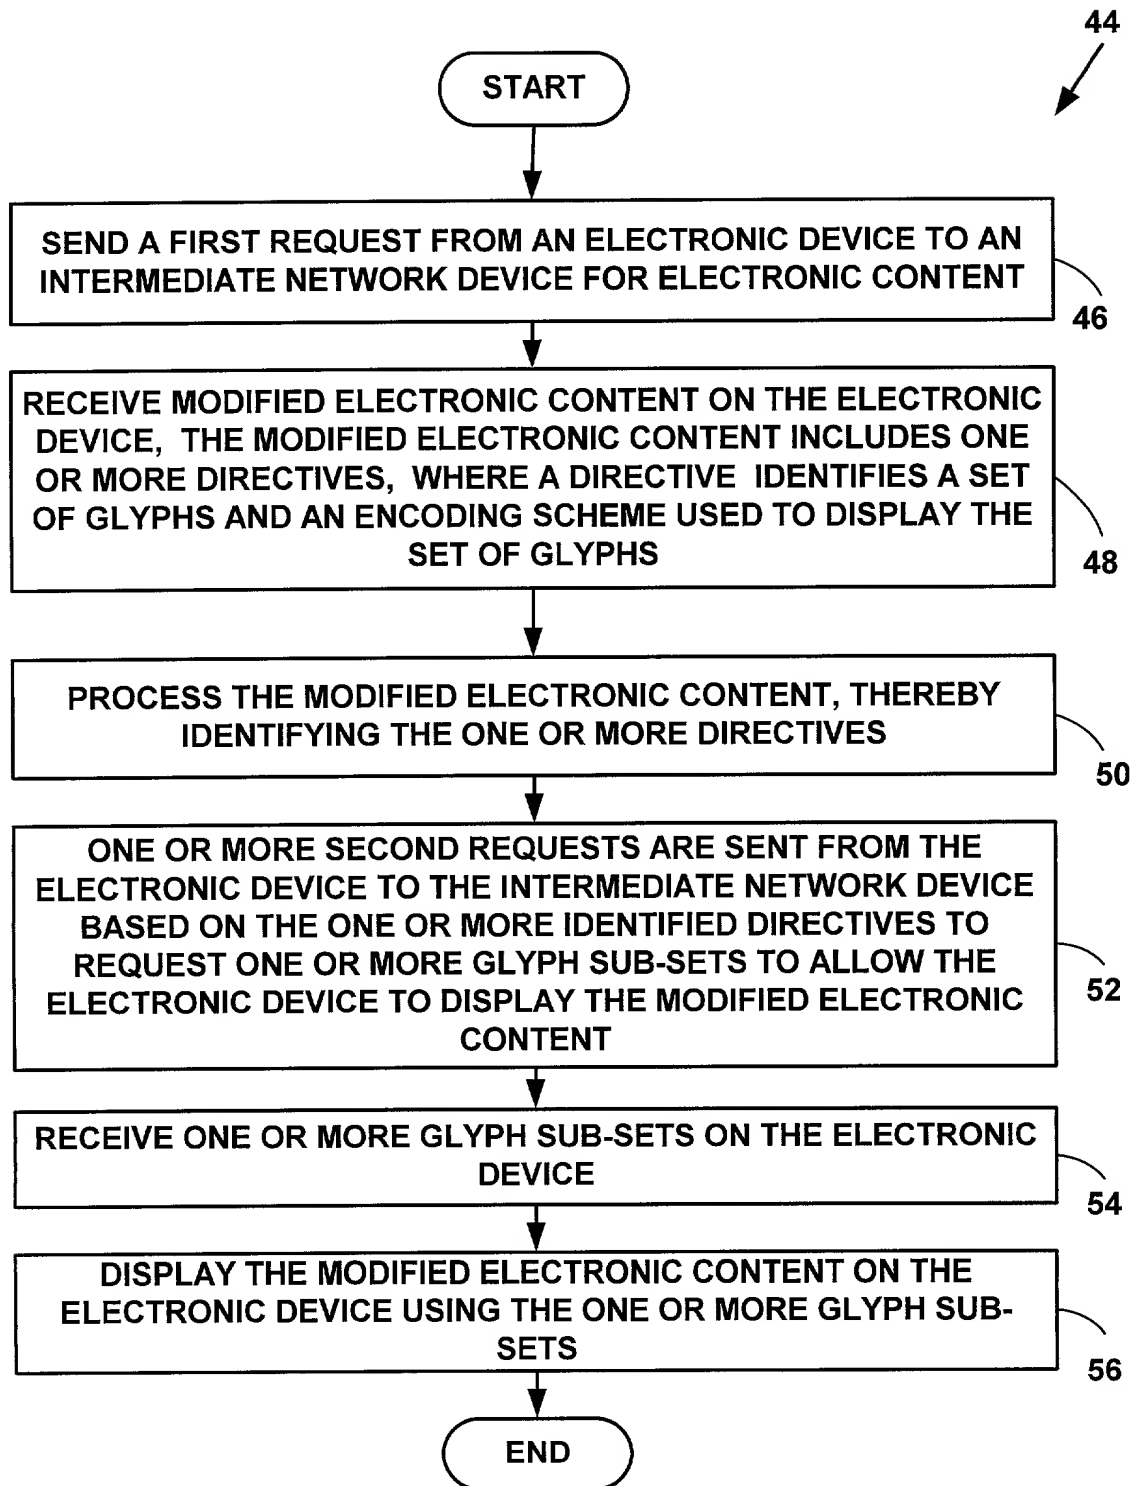

**FIG. 5**

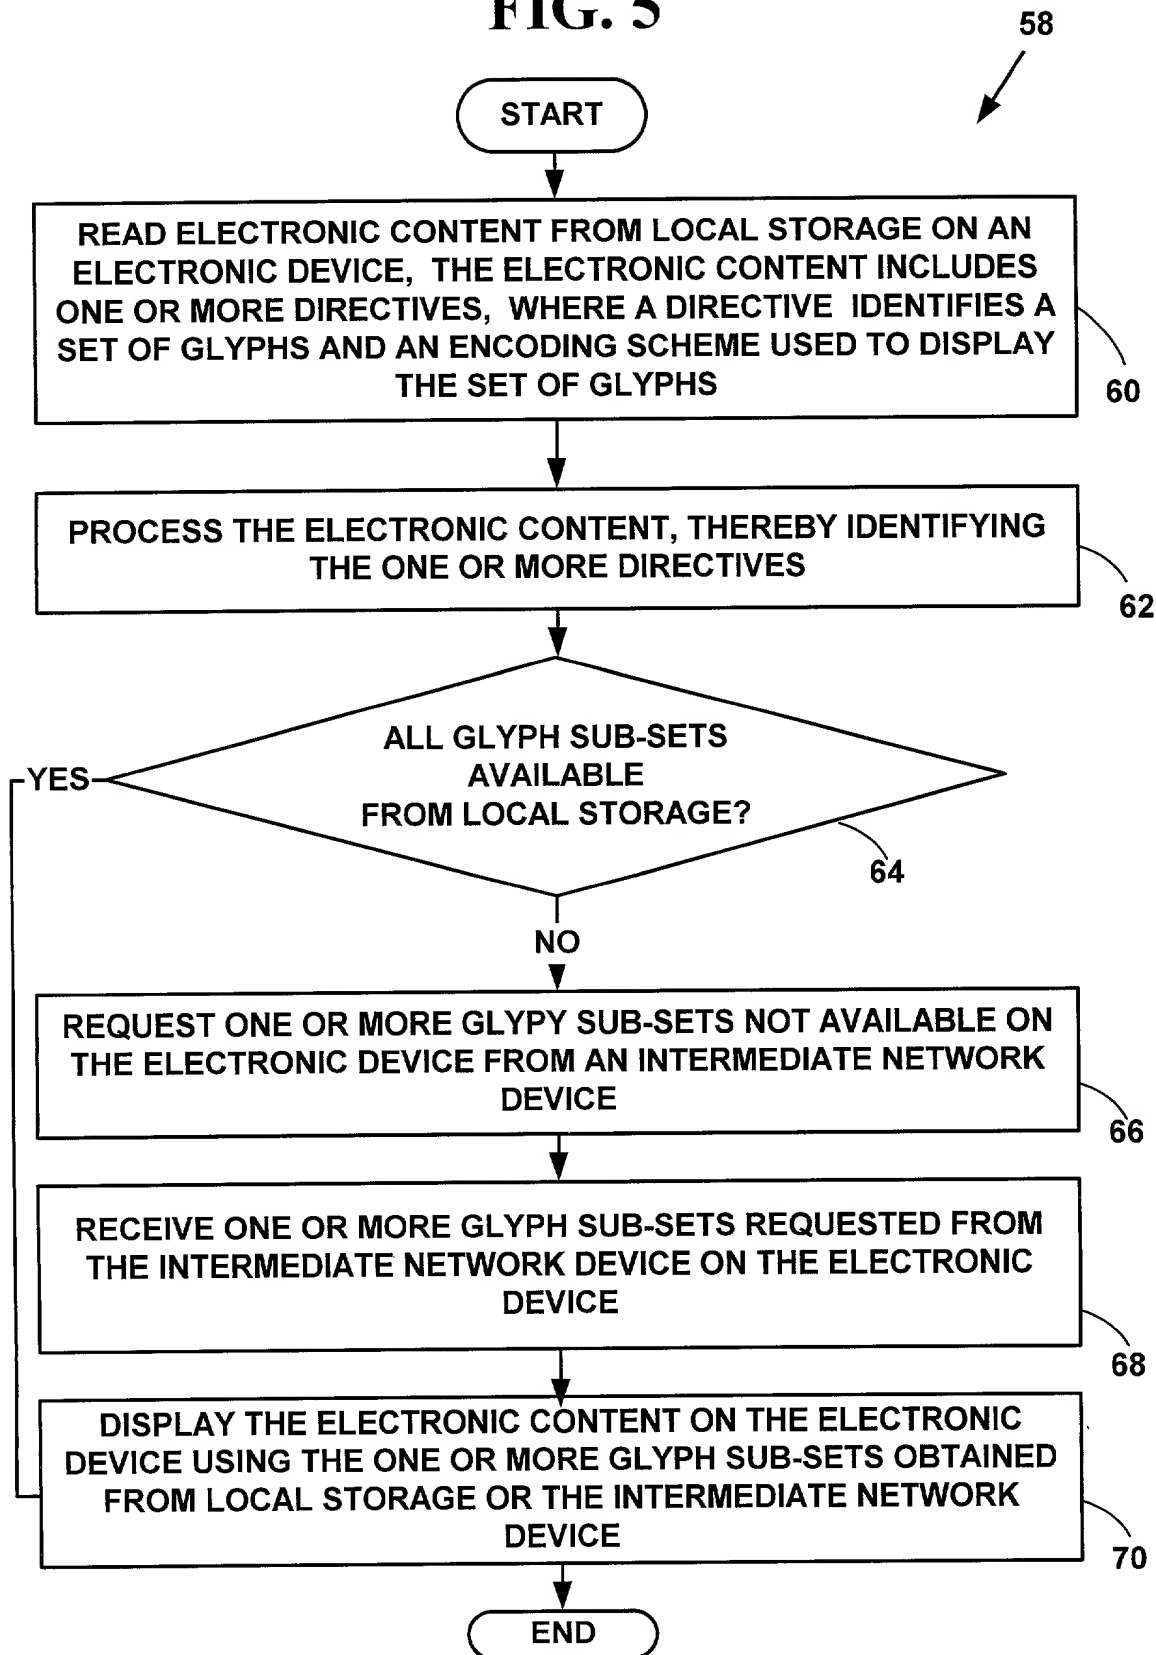

**DECLARATION AND POWER OF ATTORNEY  
FOR PATENT APPLICATION**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**METHOD AND SYSTEM FOR DYNAMIC FONT SUBSETTING**

the specification of which is attached hereto unless the following space is checked:

☐ was filed on \_\_\_\_\_ as United States Application  
Serial Number \_\_\_\_\_.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s):

	<u>Number</u>	<u>Country</u>	<u>Day/Month/Year Filed</u>
1.			
2.			

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:

<u>Application Number</u>	<u>Filing Date</u>
1.	
2.	

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

<u>Application Number</u>	<u>Filing Date</u>	<u>Status: patented, pending, abandoned</u>
1.		
2.		

I hereby appoint the following attorneys and agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Denis A. Berntsen	Reg. No. 26707	Anthoula Pomrening (agent)	Reg. No. 38805
John J. McDonnell	Reg. No. 26949	George I. Lee	Reg. No. 39269
Daniel A. Boehnen	Reg. No. 28399	James M. McCarthy	Reg. No. 39296
Bradley J. Hulbert	Reg. No. 30130	Jeremy Noe (agent)	Reg. No. 40104
Paul H. Berghoff	Reg. No. 30243	Sean M. Sullivan	Reg. No. 40191
Grantland G. Drutchas	Reg. No. 32565	Amir N. Penn	Reg. No. 40767
Steven J. Sarussi	Reg. No. 32784	Patrick J. Halloran (agent)	Reg. No. 41053
David M. Frischkorn	Reg. No. 32833	Joshua R. Rich	Reg. No. 41269
James C. Gumina	Reg. No. 32898	Thomas E. Wettermann	Reg. No. 41523
A. Blair Hughes	Reg. No. 32901	Vernon W. Francissen	Reg. No. 41762
Thomas A. Fairhall	Reg. No. 34591	Robert J. Irvine	Reg. No. 41865
Emily Miao	Reg. No. 35285	Richard A. Machonkin	Reg. No. 41962
Kevin E. Noonan	Reg. No. 35303	David S. Harper	Reg. No. 42636
Leif R. Sigmond, Jr.	Reg. No. 35680	Stephen Lesavich	Reg. No. 43749
Lawrence H. Aaronson	Reg. No. 35818	Enrique Perez	Reg. No. 43853
Matthew J. Sampson	Reg. No. 35999	Marcus J. Thymian	Reg. No. 43954
Curt J. Whitenack	Reg. No. 36054	S. Richard Carden (agent)	Reg. No. P44588
Christopher M. Cavan	Reg. No. 36475	Mark Chael (agent)	Reg. No. 44601
Michael S. Greenfield	Reg. No. 37142	Stephen H. Docter	Reg. No. 44659
Roger P. Zimmerman	Reg. No. 38670		

Address all telephone calls to **Stephen Lesavich** at (312) 913-0001.

Address all correspondence to McDONNELL BOEHNEN HULBERT & BERGHOFF, 300 South Wacker Drive, Chicago, Illinois 60606 USA.

I hereby authorize and request the attorneys of record in said application to insert in this Declaration and Power of Attorney, the filing date and serial number of said application when officially known, if necessary.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor (given name, family name): Douglas R. Adler

Inventor's signature: \_\_\_\_\_ Date: \_\_\_\_\_  
Residence: 808 Rockbridge Drive, Naperville, Illinois 60540  
Citizenship: United States of America  
Post Office Address: Same as above

Full name of second joint inventor (given name, family name): Gregory J. Nawrocki

Inventor's signature: \_\_\_\_\_ Date: \_\_\_\_\_  
Residence: 433 S. Columbia, Naperville, Illinois 60540  
Citizenship: United States of America  
Post Office Address: Same as above

Full name of third joint inventor (given name, family name): Peter A. Korp

Inventor's signature: \_\_\_\_\_ Date: \_\_\_\_\_  
Residence: 837 South River Road, Naperville, Illinois 60540  
Citizenship: United States of America  
Post Office Address: Same as above

Full name of fourth joint inventor (given name, family name): Masakatsu Yoneda

Inventor's signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: W2002, 4-1 Yukarigaoka, Sakura City, Chiba, Japan, 285-0858

Citizenship: Republic of China

Post Office Address: Same as above